




PPTC SMD Surface Mount 1812 Series

Revision: C

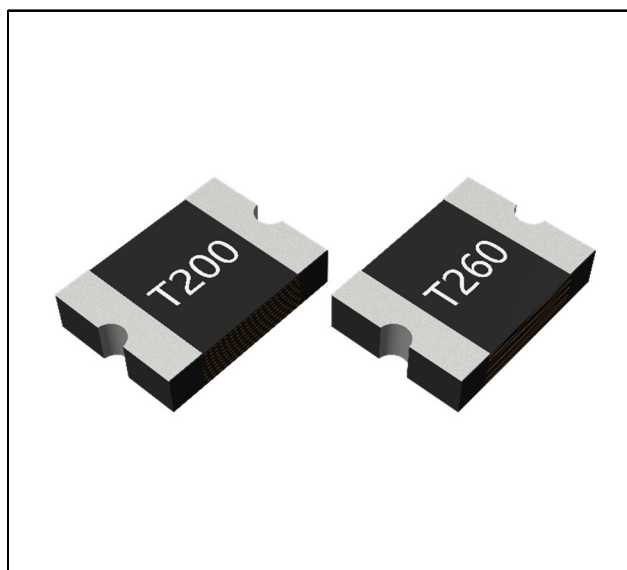

Applications

- Over current and over temperature protection of automotive electronics
- PC motherboards, Hard disk driver, and PC peripherals
- POS Equipment
- LCD / LED HDTV
- USB port protection
- HDMI source protection

Regulation/Standard



Features

- Surface Mount Devices
- Standard 1812mils footprint
- Surface Mount packaging for automated assembly
- Compatible with Pb and Pb-free solder reflow profiles

Agency Approvals

AGENCY	AGENCY FILE NUMBER
	E352136
	R50322001

Electrical Characteristics

P/N	I _{hold} (A)	I _{trip} (A)	V _{max} (V)	I _{max} (A)	Time To Trip		Pd typ(W)	Resistance		Agency Approvals	
					Current (A)	Time (Sec.)		R _{min} (Ω)	R _{1max} (Ω)	UL/CSA	TUV
TLC-MSMD010	0.10	0.30	60	10	0.5	1.50	0.8	1.0	15.0	✓	✓
TLC-MSMD010/30	0.10	0.30	30	10	0.5	1.50	0.8	1.0	15.0	×	✓
TLC-MSMD010/50	0.10	0.30	50	10	0.5	1.50	0.8	1.0	15.0	×	✓
TLC-MSMD014	0.14	0.34	60	10	1.5	0.15	0.8	1.0	6.50	✓	✓
TLC-MSMD014/50	0.14	0.34	50	10	1.5	0.15	0.8	1.0	6.50	×	✓
TLC-MSMD020	0.20	0.40	30	10	8.0	0.02	0.8	1.0	5.00	✓	✓
TLC-MSMD020/50	0.20	0.40	50	10	1.5	0.15	0.8	1.0	5.00	×	✓
TLC-MSMD020/60	0.20	0.40	60	10	1.5	0.15	0.8	1.0	6.00	✓	✓
TLC-MSMD030	0.30	0.60	30	10	8.0	0.10	0.8	0.30	3.00	×	✓
TLC-MSMD035	0.35	0.70	16	40	8.0	0.10	0.8	0.20	1.80	×	✓
TLC-MSMD035/30	0.35	0.70	30	40	8.0	0.10	0.8	0.20	1.80	✓	✓
TLC-MSMD050	0.50	1.00	15	100	8.0	0.15	0.8	0.15	1.00	×	×
TLC-MSMD050/16	0.50	1.00	16	40	8.0	0.15	0.8	0.15	1.00	×	✓
TLC-MSMD050/24	0.50	1.00	24	40	8.0	0.15	0.8	0.15	1.00	×	✓
TLC-MSMD050/30	0.50	1.00	30	100	8.0	0.15	0.8	0.15	1.00	✓	✓
TLC-MSMD050/33	0.50	1.00	33	40	8.0	0.15	0.8	0.15	1.00	×	✓
TLC-MSMD050/60	0.50	1.00	60	100	8.0	0.15	0.8	0.15	1.00	✓	×
TLC-MSMD075	0.75	1.50	16	40	8.0	0.20	0.8	0.11	0.45	✓	✓

TLC-MSMD075/24	0.75	1.50	24	40	8.0	0.20	0.8	0.11	0.45	√	√
TLC-MSMD075/33	0.75	1.50	33	40	8.0	0.20	0.8	0.11	0.40	√	√
TLC-MSMD110	1.10	2.20	6	100	8.0	0.15	0.8	0.040	0.210	√	√
TLC-MSMD110/8	1.10	2.20	8	100	8.0	0.30	0.8	0.040	0.21	√	√
TLC-MSMD110/12	1.10	2.20	12	100	8.0	0.30	0.8	0.040	0.22	×	√
TLC-MSMD110/16	1.10	2.20	16	100	8.0	0.2	0.8	0.040	0.21	√	√
TLC-MSMD110/24	1.10	2.20	24	100	8.0	0.2	1.2	0.060	0.21	√	×
TLC-MSMD110/33	1.10	2.20	33	100	8.0	0.50	1.2	0.055	0.220	√	×
TLC-MSMD125	1.25	2.50	6	40	8.0	0.40	0.8	0.035	0.140	√	×
TLC-MSMD125/8	1.25	2.50	8	100	8.0	0.40	0.8	0.035	0.140	×	√
TLC-MSMD125/12	1.25	2.50	12	100	8.0	0.40	0.8	0.035	0.140	×	√
TLC-MSMD125/16	1.25	2.50	16	100	8.0	0.40	0.8	0.035	0.140	×	√
TLC-MSMD125/30	1.25	2.50	30	100	8.0	0.40	0.8	0.035	0.210	×	√
TLC-MSMD150	1.50	3.00	6	100	8.0	0.50	0.8	0.030	0.120	√	√
TLC-MSMD150/8	1.50	3.00	8	100	8.0	0.50	0.8	0.030	0.120	×	√
TLC-MSMD150/12	1.50	3.00	12	100	8.0	0.50	1.0	0.030	0.120	√	√
TLC-MSMD150/16	1.50	3.00	16	100	8.0	0.50	1.0	0.030	0.120	×	√
TLC-MSMD150/24	1.50	3.00	24	100	8.0	1.50	1.2	0.030	0.140	√	√
TLC-MSMD160/6	1.60	3.20	6	100	8.0	1.00	1.0	0.025	0.120	×	√
TLC-MSMD160	1.60	3.20	8	100	8.0	0.5	1.0	0.025	0.120	√	√
TLC-MSMD160/12	1.60	3.20	12	100	8.0	1.00	1.0	0.025	0.120	√	√
TLC-MSMD160/16	1.60	3.20	16	100	8.0	1.00	1.0	0.025	0.120	√	√
TLC-MSMD160/24	1.60	3.20	24	100	8.0	1.00	1.0	0.025	0.140	×	√
TLC-MSMD200	2.00	4.00	8	40	8.0	3.00	1.2	0.020	0.080	√	√
TLC-MSMD200/12	2.00	4.00	12	100	8.0	3.00	1.2	0.020	0.080	√	√
TLC-MSMD200/16	2.00	4.00	16	100	8.0	3.00	1.2	0.020	0.080	√	√
TLC-MSMD200/20	2.00	4.00	20	100	8.0	3.00	1.2	0.020	0.080	×	√
TLC-MSMD200/24	2.00	4.00	24	40	8.0	3.00	1.2	0.020	0.100	√	√
TLC-MSMD250/16	2.50	5.00	16	100	8.0	5.00	1.2	0.015	0.100	√	√
TLC-MSMD250/12	2.50	5.00	12	100	8.0	5.00	1.2	0.015	0.08	×	√
TLC-MSMD250/8	2.50	5.00	8	100	8.0	5.00	1.2	0.015	0.08	×	√
TLC-MSMD260	2.60	5.20	6	100	8.0	5.00	1.2	0.015	0.080	√	√
TLC-MSMD260/8	2.60	5.20	8	100	8.0	5.00	1.2	0.015	0.080	×	√
TLC-MSMD260/12	2.60	5.20	12	100	8.0	5.00	1.2	0.015	0.080	√	√
TLC-MSMD260/16	2.60	5.20	16	100	8.0	5.00	1.2	0.015	0.080	√	√
TLC-MSMD300	3.00	6.00	6	100	8.0	5.00	1.2	0.012	0.060	√	√
TLC-MSMD300/8	3.00	6.00	8	100	8.0	5.00	1.2	0.012	0.060	×	√
TLC-MSMD300/12	3.00	6.00	12	100	8.0	5.00	1.2	0.012	0.060	×	√
TLC-MSMD300/16	3.00	6.00	16	100	8.0	5.00	1.2	0.012	0.060	×	√

I_{hold} : Holding Current: maximum current at which the device will not trip in 25°C still air.

I_{trip} : Tripping Current minimum current at which the device will trip in 25°C still air.

V_{max} : Maximum voltage device can withstand without damage at rated current.

I_{max} : Maximum fault current device can withstand without damage at rated voltage.

Time To Trip: Maximum time to trip(s) at assigned current.

P_d typ: Rated working power.

R_{min} : Minimum resistance of device prior to trip at 25°C.

R1_{max}: Maximum resistance of device is measured one hours post reflow at 25°C.

Noted: All electrical function test is conducted after PCB mounted.

Thermal Derating Chart – I hold/Itrip (Amps)


P/N	Test item	Ambient Operating Temperature								
		-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
TLC-MSMD010	I-hold	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.03
	I-trip	0.48	0.42	0.36	0.30	0.24	0.21	0.18	0.15	0.09
TLC-MSMD010/30	I-hold	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.03
	I-trip	0.48	0.42	0.36	0.30	0.24	0.21	0.18	0.15	0.09
TLC-MSMD010/50	I-hold	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.03
	I-trip	0.48	0.42	0.36	0.30	0.24	0.21	0.18	0.15	0.09
TLC-MSMD014	I-hold	0.23	0.19	0.17	0.14	0.12	0.10	0.09	0.08	0.06
	I-trip	0.56	0.46	0.41	0.34	0.29	0.24	0.22	0.19	0.15
TLC-MSMD014/50	I-hold	0.23	0.19	0.17	0.14	0.12	0.10	0.09	0.08	0.06
	I-trip	0.56	0.46	0.41	0.34	0.29	0.24	0.22	0.19	0.15
TLC-MSMD020	I-hold	0.29	0.26	0.23	0.20	0.17	0.15	0.14	0.12	0.10
	I-trip	0.58	0.52	0.46	0.40	0.34	0.30	0.28	0.24	0.20
TLC-MSMD020/50	I-hold	0.29	0.26	0.23	0.20	0.17	0.15	0.14	0.12	0.10
	I-trip	0.58	0.52	0.46	0.40	0.34	0.30	0.28	0.24	0.20
TLC-MSMD020/60	I-hold	0.29	0.26	0.23	0.20	0.17	0.15	0.14	0.12	0.10
	I-trip	0.58	0.52	0.46	0.40	0.34	0.30	0.28	0.24	0.20
TLC-MSMD030	I-hold	0.44	0.39	0.35	0.30	0.26	0.23	0.21	0.18	0.15
	I-trip	0.88	0.78	0.70	0.60	0.52	0.46	0.42	0.36	0.30
TLC-MSMD035	I-hold	0.51	0.46	0.41	0.35	0.30	0.27	0.25	0.21	0.18
	I-trip	1.02	0.92	0.82	0.70	0.60	0.54	0.50	0.42	0.36
TLC-MSMD035/30	I-hold	0.51	0.46	0.41	0.35	0.30	0.27	0.25	0.21	0.18
	I-trip	1.02	0.92	0.82	0.70	0.60	0.54	0.50	0.42	0.36
TLC-MSMD050	I-hold	0.77	0.68	0.59	0.50	0.44	0.40	0.37	0.33	0.29
	I-trip	1.54	1.36	1.18	1.00	0.88	0.80	0.74	0.66	0.58
TLC-MSMD050/16	I-hold	0.77	0.68	0.59	0.50	0.44	0.40	0.37	0.33	0.29
	I-trip	1.54	1.36	1.18	1.00	0.88	0.80	0.74	0.66	0.58
TLC-MSMD050/24	I-hold	0.77	0.68	0.59	0.50	0.44	0.40	0.37	0.33	0.29
	I-trip	1.54	1.36	1.18	1.00	0.88	0.80	0.74	0.66	0.58
TLC-MSMD050/30	I-hold	0.77	0.68	0.59	0.50	0.44	0.40	0.37	0.33	0.29
	I-trip	1.54	1.36	1.18	1.00	0.88	0.80	0.74	0.66	0.58
TLC-MSMD050/33	I-hold	0.77	0.68	0.59	0.50	0.44	0.40	0.37	0.33	0.29
	I-trip	1.54	1.36	1.18	1.00	0.88	0.80	0.74	0.66	0.58
TLC-MSMD050/60	I-hold	0.77	0.68	0.59	0.50	0.44	0.40	0.37	0.33	0.29
	I-trip	1.54	1.36	1.18	1.00	0.88	0.80	0.74	0.66	0.58
TLC-MSMD075	I-hold	1.15	1.01	0.88	0.75	0.65	0.60	0.55	0.49	0.43
	I-trip	2.30	2.02	1.76	1.50	1.30	1.20	1.10	0.98	0.86

TLC-MSMD075/24	I-hold	1.15	1.01	0.88	0.75	0.65	0.60	0.55	0.49	0.43
	I-trip	2.30	2.02	1.76	1.50	1.30	1.20	1.10	0.98	0.86
TLC-MSMD075/33	I-hold	1.15	1.01	0.88	0.75	0.65	0.60	0.55	0.49	0.43
	I-trip	2.30	2.02	1.76	1.50	1.30	1.20	1.10	0.98	0.86
TLC-MSMD110	I-hold	1.59	1.43	1.26	1.10	0.95	0.87	0.80	0.71	0.60
	I-trip	3.18	2.86	2.52	2.20	1.90	1.74	1.60	1.42	1.20
TLC-MSMD110/8	I-hold	1.59	1.43	1.26	1.10	0.95	0.87	0.80	0.71	0.60
	I-trip	3.18	2.86	2.52	2.20	1.90	1.74	1.60	1.42	1.20
TLC-MSMD110/12	I-hold	1.59	1.43	1.26	1.10	0.95	0.87	0.80	0.71	0.60
	I-trip	3.18	2.86	2.52	2.20	1.90	1.74	1.60	1.42	1.20
TLC-MSMD110/16	I-hold	1.59	1.43	1.26	1.10	0.95	0.87	0.80	0.71	0.60
	I-trip	3.18	2.86	2.52	2.20	1.90	1.74	1.60	1.42	1.20
TLC-MSMD110/24	I-hold	1.59	1.43	1.26	1.10	0.95	0.87	0.80	0.71	0.60
	I-trip	3.18	2.86	2.52	2.20	1.90	1.74	1.60	1.42	1.20
TLC-MSMD110/33	I-hold	1.59	1.43	1.26	1.10	0.95	0.87	0.80	0.71	0.60
	I-trip	3.18	2.86	2.52	2.20	1.90	1.74	1.60	1.42	1.20
TLC-MSMD125	I-hold	1.80	1.63	1.43	1.25	1.08	0.99	0.91	0.81	0.68
	I-trip	3.60	3.26	2.86	2.50	2.16	1.98	1.82	1.62	1.36
TLC-MSMD125/8	I-hold	1.80	1.63	1.43	1.25	1.08	0.99	0.91	0.81	0.68
	I-trip	3.60	3.26	2.86	2.50	2.16	1.98	1.82	1.62	1.36
TLC-MSMD125/12	I-hold	1.80	1.63	1.43	1.25	1.08	0.99	0.91	0.81	0.68
	I-trip	3.60	3.26	2.86	2.50	2.16	1.98	1.82	1.62	1.36
TLC-MSMD125/16	I-hold	1.80	1.63	1.43	1.25	1.08	0.99	0.91	0.81	0.68
	I-trip	3.60	3.26	2.86	2.50	2.16	1.98	1.82	1.62	1.36
TLC-MSMD125/30	I-hold	1.80	1.63	1.43	1.25	1.08	0.99	0.91	0.81	0.68
	I-trip	3.60	3.26	2.86	2.50	2.16	1.98	1.82	1.62	1.36
TLC-MSMD150	I-hold	2.17	1.95	1.72	1.50	1.30	1.18	1.09	0.97	0.82
	I-trip	4.34	3.90	3.44	3.00	2.60	2.36	2.18	1.94	1.64
TLC-MSMD150/8	I-hold	2.17	1.95	1.72	1.50	1.30	1.18	1.09	0.97	0.82
	I-trip	4.34	3.90	3.44	3.00	2.60	2.36	2.18	1.94	1.64
TLC-MSMD150/12	I-hold	2.17	1.95	1.72	1.50	1.30	1.18	1.09	0.97	0.82
	I-trip	4.34	3.90	3.44	3.00	2.60	2.36	2.18	1.94	1.64
TLC-MSMD150/16	I-hold	2.17	1.95	1.72	1.50	1.30	1.18	1.09	0.97	0.82
	I-trip	4.34	3.90	3.44	3.00	2.60	2.36	2.18	1.94	1.64
TLC-MSMD150/24	I-hold	2.17	1.95	1.72	1.50	1.30	1.18	1.09	0.97	0.82
	I-trip	4.34	3.90	3.44	3.00	2.60	2.36	2.18	1.94	1.64
TLC-MSMD160/6	I-hold	2.30	2.20	1.90	1.60	1.45	1.30	1.15	1.03	0.91
	I-trip	4.60	4.40	3.80	3.20	2.90	2.60	2.30	2.06	1.82
TLC-MSMD160	I-hold	2.30	2.20	1.90	1.60	1.45	1.30	1.15	1.03	0.91
	I-trip	4.60	4.40	3.80	3.20	2.90	2.60	2.30	2.06	1.82
TLC-MSMD160/12	I-hold	2.30	2.20	1.90	1.60	1.45	1.30	1.15	1.03	0.91
	I-trip	4.60	4.40	3.80	3.20	2.90	2.60	2.30	2.06	1.82
TLC-MSMD160/16	I-hold	2.30	2.20	1.90	1.60	1.45	1.30	1.15	1.03	0.91
	I-trip	4.60	4.40	3.80	3.20	2.90	2.60	2.30	2.06	1.82

TLC-MSMD160/24	I-hold	2.30	2.20	1.90	1.60	1.45	1.30	1.15	1.03	0.91
	I-trip	4.60	4.40	3.80	3.20	2.90	2.60	2.30	2.06	1.82
TLC-MSMD200	I-hold	3.08	2.71	2.35	2.00	1.80	1.60	1.50	1.40	1.25
	I-trip	6.16	5.42	4.70	4.00	3.60	3.20	3.00	2.80	2.50
TLC-MSMD200/12	I-hold	3.08	2.71	2.35	2.00	1.80	1.60	1.50	1.40	1.25
	I-trip	6.16	5.42	4.70	4.00	3.60	3.20	3.00	2.80	2.50
TLC-MSMD200/16	I-hold	3.08	2.71	2.35	2.00	1.80	1.60	1.50	1.40	1.25
	I-trip	6.16	5.42	4.70	4.00	3.60	3.20	3.00	2.80	2.50
TLC-MSMD200/20	I-hold	3.08	2.71	2.35	2.00	1.80	1.60	1.50	1.40	1.25
	I-trip	6.16	5.42	4.70	4.00	3.60	3.20	3.00	2.80	2.50
TLC-MSMD200/24	I-hold	3.08	2.71	2.35	2.00	1.80	1.60	1.50	1.40	1.25
	I-trip	6.16	5.42	4.70	4.00	3.60	3.20	3.00	2.80	2.50
TLC-MSMD250/16	I-hold	3.85	3.45	3.00	2.50	2.05	1.85	1.75	1.30	1.10
	I-trip	7.70	6.90	6.00	5.00	4.10	3.70	3.50	2.60	2.20
TLC-MSMD250/12	I-hold	3.85	3.45	3.00	2.50	2.05	1.85	1.75	1.30	1.10
	I-trip	7.70	6.90	6.00	5.00	4.10	3.70	3.50	2.60	2.20
TLC-MSMD250/8	I-hold	3.85	3.45	3.00	2.50	2.05	1.85	1.75	1.30	1.10
	I-trip	7.70	6.90	6.00	5.00	4.10	3.70	3.50	2.60	2.20
TLC-MSMD260	I-hold	4.00	3.52	3.06	2.60	2.34	2.08	1.95	1.39	1.04
	I-trip	8.00	7.04	6.12	5.20	4.68	4.16	3.90	2.78	2.08
TLC-MSMD260/8	I-hold	4.00	3.52	3.06	2.60	2.34	2.08	1.95	1.39	1.04
	I-trip	8.00	7.04	6.12	5.20	4.68	4.16	3.90	2.78	2.08
TLC-MSMD260/12	I-hold	4.00	3.52	3.06	2.60	2.34	2.08	1.95	1.39	1.04
	I-trip	8.00	7.04	6.12	5.20	4.68	4.16	3.90	2.78	2.08
TLC-MSMD260/16	I-hold	4.00	3.52	3.06	2.60	2.34	2.08	1.95	1.39	1.04
	I-trip	8.00	7.04	6.12	5.20	4.68	4.16	3.90	2.78	2.08
TLC-MSMD300	I-hold	4.40	3.90	3.50	3.00	2.60	2.30	2.10	1.80	1.50
	I-trip	8.80	7.80	7.00	6.00	5.20	4.60	4.20	3.60	3.00
TLC-MSMD300/8	I-hold	4.40	3.90	3.50	3.00	2.60	2.30	2.10	1.80	1.50
	I-trip	8.80	7.80	7.00	6.00	5.20	4.60	4.20	3.60	3.00
TLC-MSMD300/12	I-hold	4.40	3.90	3.50	3.00	2.60	2.30	2.10	1.80	1.50
	I-trip	8.80	7.80	7.00	6.00	5.20	4.60	4.20	3.60	3.00
TLC-MSMD300/16	I-hold	4.40	3.90	3.50	3.00	2.60	2.30	2.10	1.80	1.50
	I-trip	8.80	7.80	7.00	6.00	5.20	4.60	4.20	3.60	3.00

Notes: The temperature rating data is for reference only. Please contact TLC technical support for detail temperature rating information.

Typical time to trip at 25°C

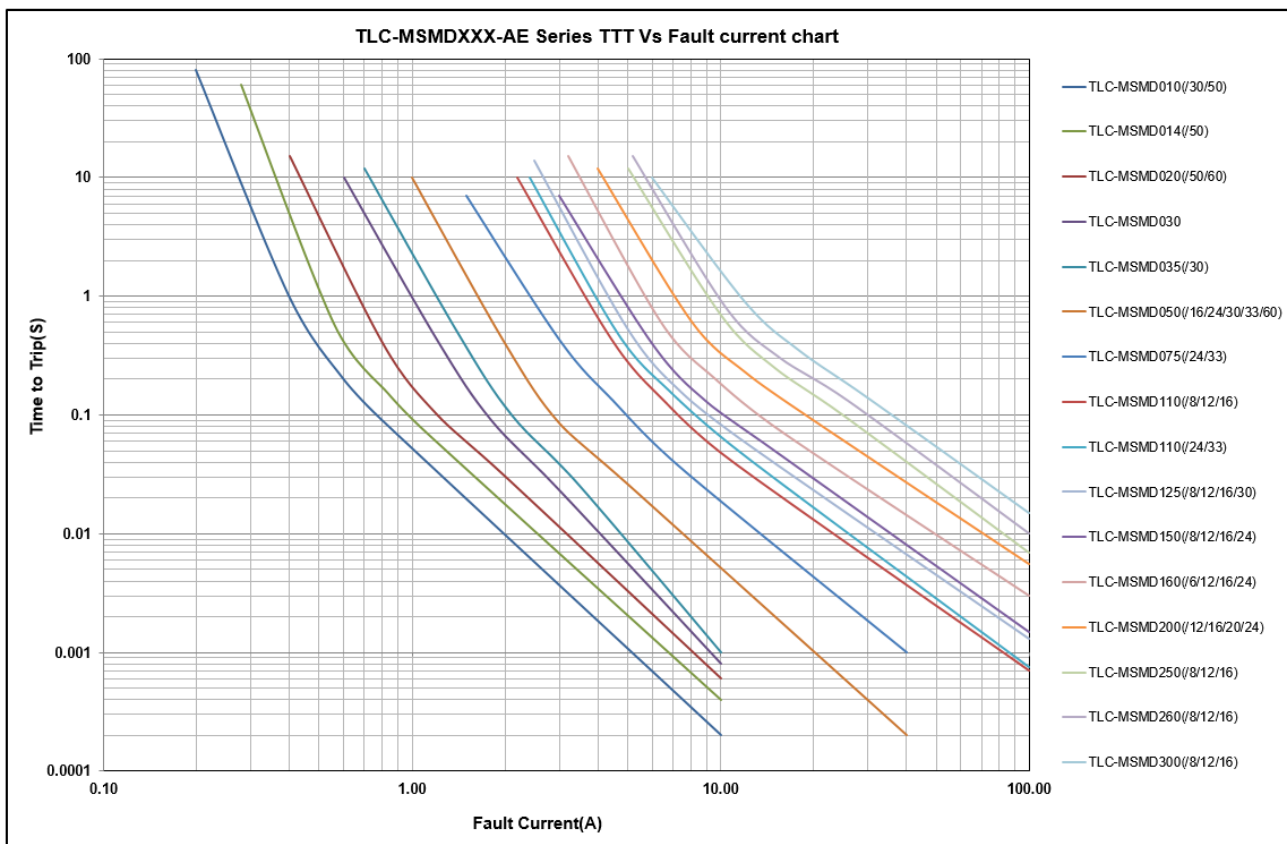

Note: TLC-MSMD010(/30/50) is represented for TLC-MSMD010 and TLC-MSMD010/30 and TLC-MSMD010/50, and so on

Product Dimensions & Marking (Unit: mm)

Top and Bottom View	Side View	Recommended Pad Layout(mm)	Part Identification

P/N	Marking	Device Dimension							Recommended Pad Layout(mm)		
		A		B		C		D	F	G	H
		Min.	Max.	Min.	Max.	Min.	Max.	Min.	Nor.	Nor.	Nor.
TLC-MSMD010	T010	4.37	4.73	3.07	3.41	0.80	1.20	0.30	1.50	2.70	3.20
TLC-MSMD010/30	T010	4.37	4.73	3.07	3.41	0.80	1.20	0.30	1.50	2.70	3.20
TLC-MSMD010/50	T010	4.37	4.73	3.07	3.41	0.80	1.20	0.30	1.50	2.70	3.20
TLC-MSMD014	T014	4.37	4.73	3.07	3.41	0.80	1.20	0.30	1.50	2.70	3.20

TLC-MSMD014/50	T014	4.37	4.73	3.07	3.41	0.80	1.20	0.30	1.50	2.70	3.20
TLC-MSMD020	T020	4.37	4.73	3.07	3.41	0.80	1.20	0.30	1.50	2.70	3.20
TLC-MSMD020/50	T020	4.37	4.73	3.07	3.41	0.80	1.20	0.30	1.50	2.70	3.20
TLC-MSMD020/60	T020	4.37	4.73	3.07	3.41	0.80	1.20	0.30	1.50	2.70	3.20
TLC-MSMD030	T030	4.37	4.73	3.07	3.41	0.80	1.20	0.30	1.50	2.70	3.20
TLC-MSMD035	T035	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD035/30	T035	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD050	T050	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD050/16	T050	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD050/24	T050	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD050/30	T050	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD050/33	T050	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD050/60	T050	4.37	4.73	3.07	3.41	1.10	1.50	0.30	1.50	2.70	3.20
TLC-MSMD075	T075	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD075/24	T075	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD075/33	T075	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD110	T110	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD110/8	T110	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD110/12	T110	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD110/16	T110	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD110/24	T110	4.37	4.73	3.07	3.41	0.80	1.20	0.30	1.50	2.70	3.20
TLC-MSMD110/33	T110	4.37	4.73	3.07	3.41	0.80	1.40	0.30	1.50	2.70	3.20
TLC-MSMD125	T125	4.37	4.73	3.07	3.41	0.45	0.85	0.30	1.50	2.70	3.20
TLC-MSMD125/8	T125	4.37	4.73	3.07	3.41	0.45	0.85	0.30	1.50	2.70	3.20
TLC-MSMD125/12	T125	4.37	4.73	3.07	3.41	0.45	0.85	0.30	1.50	2.70	3.20
TLC-MSMD125/16	T125	4.37	4.73	3.07	3.41	0.45	0.85	0.30	1.50	2.70	3.20
TLC-MSMD125/30	T125	4.37	4.73	3.07	3.41	1.10	1.50	0.30	1.50	2.70	3.20
TLC-MSMD150	T150	4.37	4.73	3.07	3.41	0.45	0.85	0.30	1.50	2.70	3.20
TLC-MSMD150/8	T150	4.37	4.73	3.07	3.41	0.45	0.85	0.30	1.50	2.70	3.20
TLC-MSMD150/12	T150	4.37	4.73	3.07	3.41	0.45	0.85	0.30	1.50	2.70	3.20
TLC-MSMD150/16	T150	4.37	4.73	3.07	3.41	0.45	0.85	0.30	1.50	2.70	3.20
TLC-MSMD150/24	T150	4.37	4.73	3.07	3.41	1.20	1.70	0.30	1.50	2.70	3.20
TLC-MSMD160/6	T160	4.37	4.73	3.07	3.41	0.45	0.85	0.30	1.50	2.70	3.20
TLC-MSMD160	T160	4.37	4.73	3.07	3.41	0.45	0.85	0.30	1.50	2.70	3.20
TLC-MSMD160/12	T160	4.37	4.73	3.07	3.41	0.45	0.85	0.30	1.50	2.70	3.20
TLC-MSMD160/16	T160	4.37	4.73	3.07	3.41	0.45	0.85	0.30	1.50	2.70	3.20
TLC-MSMD160/24	T160	4.37	4.73	3.07	3.41	1.00	1.60	0.30	1.50	2.70	3.20
TLC-MSMD200	T200	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD200/12	T200	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD200/16	T200	4.37	4.73	3.07	3.41	0.90	1.30	0.30	1.50	2.70	3.20
TLC-MSMD200/20	T200	4.37	4.73	3.07	3.41	0.90	1.30	0.30	1.50	2.70	3.20
TLC-MSMD200/24	T200	4.37	4.73	3.07	3.41	1.30	1.70	0.30	1.50	2.70	3.20
TLC-MSMD250/16	T250	4.37	4.73	3.07	3.41	0.90	1.30	0.30	1.50	2.70	3.20
TLC-MSMD250/12	T250	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20

TLC-MSMD250/8	T250	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD260	T260	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD260/8	T260	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD260/12	T260	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD260/16	T260	4.37	4.73	3.07	3.41	0.90	1.30	0.30	1.50	2.70	3.20
TLC-MSMD300	T300	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD300/8	T300	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD300/12	T300	4.37	4.73	3.07	3.41	0.60	1.00	0.30	1.50	2.70	3.20
TLC-MSMD300/16	T300	4.37	4.73	3.07	3.41	0.9	1.30	0.30	1.50	2.70	3.20

Packaging

P/N	Product size	Packaging Option	Quantity
TLC-MSMD010	1812	Tape&Reel	1500
TLC-MSMD010/30	1812	Tape&Reel	1500
TLC-MSMD010/50	1812	Tape&Reel	1500
TLC-MSMD014	1812	Tape&Reel	1500
TLC-MSMD014/50	1812	Tape&Reel	1500
TLC-MSMD020	1812	Tape&Reel	1500
TLC-MSMD020/50	1812	Tape&Reel	1500
TLC-MSMD020/60	1812	Tape&Reel	1500
TLC-MSMD030	1812	Tape&Reel	1500
TLC-MSMD035	1812	Tape&Reel	1500
TLC-MSMD035/30	1812	Tape&Reel	1500
TLC-MSMD050	1812	Tape&Reel	2000
TLC-MSMD050/16	1812	Tape&Reel	2000
TLC-MSMD050/24	1812	Tape&Reel	2000
TLC-MSMD050/30	1812	Tape&Reel	2000
TLC-MSMD050/33	1812	Tape&Reel	2000
TLC-MSMD050/60	1812	Tape&Reel	1000
TLC-MSMD075	1812	Tape&Reel	2000
TLC-MSMD075/24	1812	Tape&Reel	2000
TLC-MSMD075/33	1812	Tape&Reel	2000
TLC-MSMD110	1812	Tape&Reel	2000
TLC-MSMD110/8	1812	Tape&Reel	2000
TLC-MSMD110/12	1812	Tape&Reel	2000
TLC-MSMD110/16	1812	Tape&Reel	2000
TLC-MSMD110/24	1812	Tape&Reel	1500
TLC-MSMD110/33	1812	Tape&Reel	1500
TLC-MSMD125	1812	Tape&Reel	2000
TLC-MSMD125/8	1812	Tape&Reel	2000
TLC-MSMD125/12	1812	Tape&Reel	2000
TLC-MSMD125/16	1812	Tape&Reel	2000
TLC-MSMD125/30	1812	Tape&Reel	1000


TLC-MSMD150	1812	Tape&Reel	2000
TLC-MSMD150/8	1812	Tape&Reel	2000
TLC-MSMD150/12	1812	Tape&Reel	2000
TLC-MSMD150/16	1812	Tape&Reel	2000
TLC-MSMD150/24	1812	Tape&Reel	1000
TLC-MSMD160/6	1812	Tape&Reel	2000
TLC-MSMD160	1812	Tape&Reel	2000
TLC-MSMD160/12	1812	Tape&Reel	2000
TLC-MSMD160/16	1812	Tape&Reel	2000
TLC-MSMD160/24	1812	Tape&Reel	1500
TLC-MSMD200	1812	Tape&Reel	1500
TLC-MSMD200/12	1812	Tape&Reel	1500
TLC-MSMD200/16	1812	Tape&Reel	1500
TLC-MSMD200/20	1812	Tape&Reel	1500
TLC-MSMD200/24	1812	Tape&Reel	1000
TLC-MSMD250/16	1812	Tape&Reel	1500
TLC-MSMD250/12	1812	Tape&Reel	1500
TLC-MSMD250/8	1812	Tape&Reel	1500
TLC-MSMD260	1812	Tape&Reel	1500
TLC-MSMD260/8	1812	Tape&Reel	1500
TLC-MSMD260/12	1812	Tape&Reel	1500
TLC-MSMD260/16	1812	Tape&Reel	1500
TLC-MSMD300	1812	Tape&Reel	1500
TLC-MSMD300/8	1812	Tape&Reel	1500
TLC-MSMD300/12	1812	Tape&Reel	1500
TLC-MSMD300/16	1812	Tape&Reel	1500

Reliability Requirement

Humidity Aging	+85°C, 85% R.H., 1000 hours R min < R < R1max
Passive Aging	+85°C, 1000 hours R min < R < R1max
Thermal Shock	30min@-40°C ~ 30min@85°C, , 20cycles R min < R < R1max
Resistance to Solvents	MIL-STD-202, Method 215 Marking Still legible
Vibration	MIL-STD-883C, Method 2007.1, Condition A R min < R < R1max
Solderability	245°C ± 5°C, 5 Seconds > 95% coverage

Solder Reflow Conditions

Reflow Profile	Lead free
Heating rate from T _{smax} to T _p	Max. 3°C/second
Pre-heat:	

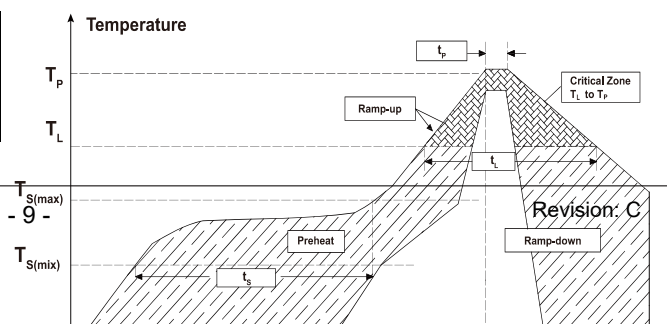


Tsmin	150℃
Tsmax	200℃
Tsmin to Tsmax	60~180seconds
Soldering time:	>217℃
Temperature (TL) Time (tL)	60~150seconds
Peak temperature (Tp)	260℃
Time at Peak temperature ±5 (tp)	20~40seconds
Cooling rate	Max.6℃/second
Time from 25℃ to Peak Temperature	8 minutes max

Warning for Reflow:


- 1.The printed solder thickness is not over 0.25mm. Excess solder may cause a short circuit, especially during hand soldering.
- 2.If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.
- 3.Device can not be wave soldered. Please contact TLC for hand soldering and dip soldering recommendations.
- 4.Device can't contact solvent.

Note: All temperature in top chart is measured on the surface of devices.


Product Ordering Number System



Tape and Reel Specification

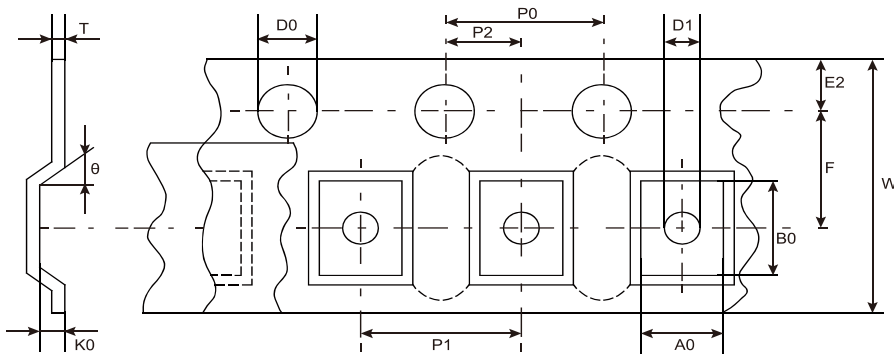

Item	A0	B0	D0	D1	E2	F	K0
Spec.(mm)	3.66±0.10	4.98±0.10	1.50(+0.10)	1.50 min	1.75±0.10	5.50±0.05	0.95/1.50/1.7(±0.1)
Item	P0	P1	P2	T	W	θ	
Spec.(mm)	4.00±0.10	8.00±0.10	2.00±0.05	0.60 max	12.3±0.30	6°max	

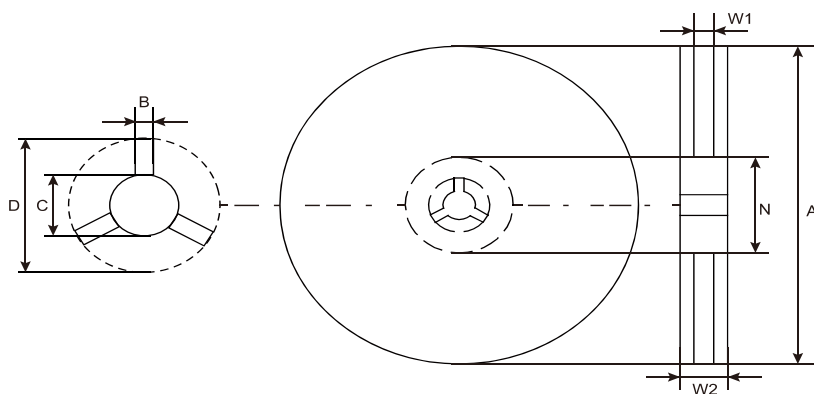

Item	A	B	C	D	N	W1	W2
Spec.(mm)	179±1.0	1.5 min	13.2±1.5	20.2 min	50 min	13.6±2.0	15.8±2.0

Environmental Characteristics

Operating/Storage Temperature -40 °C to +85 °C

Maximum Device Surface Temperature in Tripped State 125 °C

Storage Conditions +40 °C Max. 70% RH Max. Packed in original packaging.

Cautions for SMD PPTC Use

1. Operation beyond the rated maximum voltage or current may result in device damage and possible electrical arcing or flame.
2. Hold current at all temperatures specified in the SPEC is the conventional performance of PTC obtained by one time reflow welding. PTC can hold 1 hour under current conditions at a given temperature. This current is not the condition of long-term charging or discharging current for this type of PTC.
3. The above parameters are concluded from one time of reflow soldering processing the PTC. If there is any further heat generated process like injection or dispensing at the customer's premise, the aforementioned parameters will decrease at certain degree. Therefore the verification test to be conducted is necessary.
4. The PTC is thermal sensitive device. It is recommended not to design any heat source devices around it to reduce the outside heat source impact.
5. SMD PTC is designed for SMT processing which applies reflow soldering. Please refer to the recommended solder reflow curve. If the reflow soldering temperature exceeds the recommended value, the PTC might be damaged. Hand welding PTC is prohibited. Heat gun is not allowed to use during the circuit board components or terminals rework .
6. Please do not smash, clamp, pull, dent or twist by tool during assembling process otherwise it might be a cause of the performance degradation.
7. PTC is resettable protection device which shall not be taken for use as switch. Multiple times tripping shall lower the PTC hold current.
8. In the process of PTC processing, if there is soldering iron welding process, it is suggested that the welding position should be more than 1.5mm away from PTC, the welding tool temperature should be lower than 350 °C, and the contact time between soldering iron and solder joint should not exceed 3sec.